


## Overview

LCD 2.0 can be used seamlessly in any lighting condition: from dark spaces to bright, direct sunlight. Sharp's reflective, MIP LCD technology enables Azumo's patented lightguide technology to deliver high quality images with ultra-low power consumption, extending the battery life of your device. The active matrix MIP LCD integrated with a highly efficient front light offers a superior user experience for a variety of applications where outdated, static HMI no longer suffices.

- ✓ **Sufficient brightness** as low as 6 mW
- ✓ **Less power** compared to a backlit LCD
- ✓ Active matrix MIP LCD enables **dynamic menu-driven, multi page HMI**
- ✓ Superior **readability** in all lighting conditions
- ✓ SPI interface for **simple connectivity**
- ✓ 0.05mm thick, Azumo film is over **5x thinner** than alternative light guides
- ✓ **Intrinsically safe** with wide temperature range

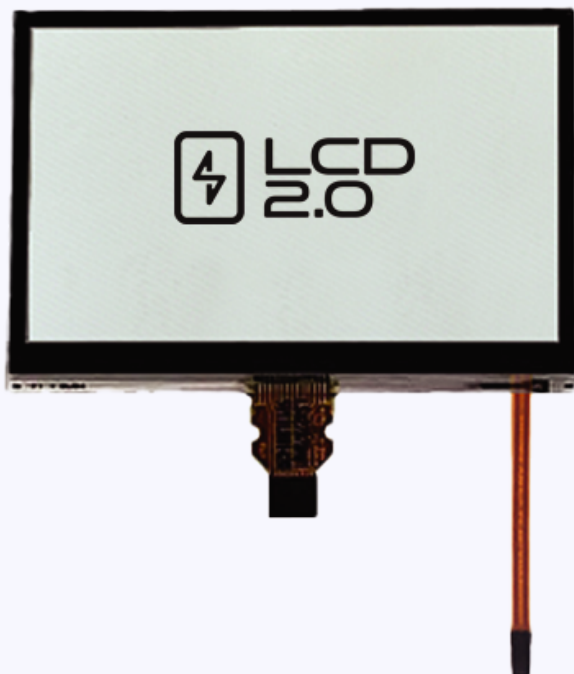

[View Mechanical Drawing](#)

Sharp Display P/N	LS027B7DH01
Resolution	400 x 240
Active Area	58.8 mm x 35.28 mm
PPI	173
Display Colors	B & W
Outline	62.8 (W) x 42.82 (H) x 1.64 (D)
Display Thickness	2.08 mm
Display Power Consumption (Static Image)	50 μW
Display Power Supply Voltage	5.0V (Analog) & 5.0V (Digital)
Response Time, Rise + Fall	10 + 20 ms
Interface	SPI
Front Light Power Supply Voltage	3.0V
Front Light Power Consumption	6 - 75 mW
Front Light Brightness, Typ	21 nits at 60 mW
Contrast Ratio - Front Light ON	14
Viewing Angle - Native LCD	55/55° (H) & 60/60° (V)
Storage temperature (C°)	-30°C ~ 80°C
Operating temperature (C°)	-20°C ~ 70°C